

Variation of Parameters Method for Thermal Analysis of Straight Convective- Radiative Fins with Temperature Dependent Thermal Conductivity

Akinbowale T. Akinshilo^{a*}, Joseph O. Olofinkua^a

^a Department of Mechanical Engineering, University of Lagos, Akoka-Yaba, Lagos, Nigeria

ARTICLE INFO

Article history:

Received: 22 January 2018

Accepted: 23 February 2018

Keywords:

Analysis

fins

convection

radiation

variation of parameters method

ABSTRACT

In this study, thermal performance across straight convective-radiative fin with temperature dependent thermal conductivity is considered. The variation of parameters method (VPM) is adopted to analyze the nonlinear higher order differential equations arising due to thermal conductivity and heat transfer coefficient on temperature distribution. Where pertinent parameters such as thermo geometric and radiation parameters effect on temperature profile are investigated. Result obtained depicts quantitative increase of thermo geometric parameter causes significant increase in temperature distribution due to increasing ratio of convective/conduction heat transfer which influence is significant toward fin base. While increasing radiation parameter leads to decrease in temperature distribution due to increasing heat transfer from fins surface to ambient environment. Comparative analysis of result obtained in study against literature proves to be in satisfactory agreement. Therefore study provides useful insight to fins operational performance in devices such as radiators, boilers, refrigerator, oil pipelines amongst other heat transfer applications.

1. Introduction

Thermal performance analysis of fins as been a motivating subject of interest amongst reseachers overtime [1-16]. Owing to its vast range of applications not limited to refrigeration and airconditioning, heat exchangers, steam and power plant amongst others. In the bid to determine the performance of fins Aziz and Enamul-Huq [1] used perturbation method to analyse convecting fins. Shortly after Aziz [2] extended his research on convecting fins but considered internal heat generation. Mosayebidorcheh et al. [3] provided approximate analytical solutions to temperature dependent thermal conductivity with power law while Ganji and Dogonchi [4] investigated convective heat transfer in longitudinal fins utilizing approximate analytical methods. Least

square method of solution was adapted by Aziz and Bouaziz [5] for longitudinal fins with temperature dependent internal heat generation. Hosseini et al. [6] analysed fins with temperature dependent thermal conductivity and heat generation. Analysis for thermal performance on convective fins was investigated by Ghasemi et al. [7] considering thermal conductivity and heat generation. Hatami et al. [8-12] studied fins for practical applications such as refrigeration, internal combustion engines and exhaust waste recovery system. In the bid to improve operational performance. Atay and Coskun [13] compared finite element method of solution against variational iteration method for power law fin type problems. Homotopy perturbation method was applied by Chowdhury et al. [14] to heat transfer equations. Moitheki et al. [15] provided exact solution of fin

problems with power law temperature dependent thermal conductivity. As Khan et al. [16] analyzed nonlinear fin problems with temperature dependent thermal conductivity and heat transfer coefficient.

Therefore the use of numerical and analytical approximate solutions was applied by researchers [17-26]. Methods of solutions utilised include the perturbation method (PM), homotopy analysis method (HAM), homotopy perturbation method (HPM), differential transform method (DTM), variational iteration method (VIM), Galerkin method of weighted residuals and Adomian decomposition method (ADM). Methods such as PM are limited owing to the problems of linear restrictive assumptions. The need to find initial condition or auxiliary parameter to satisfy the boundary condition makes methods such as HPM, VIM, DTM, HAM require computational tools in handling solution of large parameters resulting to large computational cost and time. The Galerkin method of weighted residual scheme, no doubt a powerful approximate analytical method requires the weighted residuals to satisfy weighting functions which may be arbitrary. The method of solution by decomposing nonlinear coupled equations into linear and nonlinear terms as the case of ADM makes it necessary to determine Lagrangian polynomial which makes this method cumbersome and labourious for yet simple problems. In the search for convenient and relatively simple method of solution, the variation of parameters method (VPM) is considered. Since it has the capacity to solve weakly and strongly dependent nonlinear equations. It has a rapid convergent rate without taking the highest order term into consideration as compared with VIM. Solid structured systems made of nanometer sized molecular components play a crucial role in determining fin type material. This requires the manipulation of various material matter and modelling to satisfy performance. Therefore the nanotechnology, a field relevant for engineering advancement in the nanorealm applies nanometer control for material fabrication integrated into functional working device. The application of this science as provided materials functionally efficient for various heat and mass transfer applications. Significant progress has been made in the application of nanoelectromechanical systems to determine and analyze mechanical properties and behaviour of solid structures. As controlled experiments are highly expensive. Thus, the renaissance amongst researchers to develop continuum models to study static and dynamic behaviour of nanosized solid structured systems [27-40].

Therefore VPM been free from discretization, linearization or determination of Lagrangian polynomial is the favoured scheme adopted to study thermal performance in the nanostructured material. Hence thermal analysis of convective radiative fins with temperature dependent thermal conductivity is investigated.

2. Model Development and Problem Formulation

A straight fin undergoing convective and radiative heat transfer having length L, temperature dependent thermal conductivity $k(T)$ and thickness δ , is exposed to the convective environment with both faces at a temperature T_a and convective heat transfer coefficient h as depicted in the Fig. 1. Heat transfer in the fin is

assumed constant with time and surrounding medium of the fin with fin base temperature are at uniform temperature. Also fin base joining prime surface as no contact resistance. Fin thickness compared with width and length is small. Therefore heat transfer from fin edges and temperature gradient across fin may be neglected. The co-ordinate length as its origin from the fin's tip with a positive orientation from the tip to the base of the fin. With respect to the above assumptions, the problem governing differential equation is presented as:

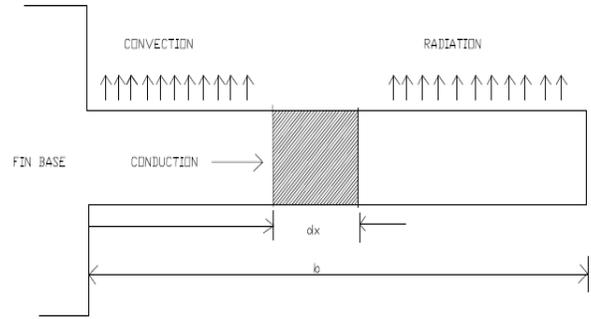


Figure 1. Physical model of problem.

$$\frac{d}{dx} \left(k_a [1 + \lambda(T - T_a)] A_{cr} \frac{dT}{dx} + \frac{4\sigma A_{cr}}{3\beta_R} \frac{dT^4}{dx} \right) = hP(T - T_\infty) + \sigma \varepsilon P(T^4 - T_\infty^4) dx \quad (1)$$

$$\frac{d}{dx} \left([1 + \lambda(T - T_\infty)] \frac{dT}{dx} \right) + \frac{4\sigma}{3\beta_R k_a} \frac{d}{dx} \left(\frac{dT^4}{dx} \right) - \frac{h}{k_a t} (T - T_\infty) + \frac{\sigma \varepsilon}{k_a t} (T^4 - T_\infty^4) = 0 \quad (2)$$

$$x = 0, \frac{dT}{dx} = 0 \quad (3)$$

$$x = b, T = T_b \quad (4)$$

But

$$\frac{J_c x J_c}{\sigma} = \sigma B_o^2 u^2 \quad (5)$$

Here small temperature difference exists during heat flow within material. The difference is necessitated using thermal fin properties and temperature invariant physical models. However in such situation, T^4 may be expressed as linear function of temperature. This is expressed as:

$$T^4 \cong 4T_\infty^3 T - 3T_\infty^4 \quad (6)$$

Substituting the Eq. (6) into Eq. (2) can be expressed as

$$\frac{d}{dx} \left([1 + \lambda(T - T_\infty)] \frac{dT}{dx} \right) + \frac{16\sigma}{3\beta_R k_a} \frac{d^2 T}{dx^2} - \frac{h}{k_a t} (T - T_\infty) + \frac{4\sigma \varepsilon P}{k_a t} (T - T_\infty) = 0 \quad (7)$$

Where non-dimensional parameters are introduced as:

$$X = \frac{x}{b}, \theta = \frac{T - T_\infty}{T_b - T_\infty}, \beta = \lambda(T_b - T_\infty), M^2 = \frac{pbh}{A_b k_a}, R_d = \frac{4\sigma_{st} T_\infty^3}{3\beta_R k_a}, N_r = \frac{4\sigma_{st} \varepsilon b T_\infty^3}{k_a} \quad (8)$$

With the aid of the dimensionless parameters introduced in Eq. (8), the governing equation can be expressed as:

$$(1 + 4R_d) \frac{d^2 \theta}{dX^2} + \beta \theta \frac{d^2 \theta}{dX^2} + \beta \left(\frac{d\theta}{dX} \right)^2 - M^2 \theta - N_r \theta = 0 \quad (9)$$

This is further expressed as

$$\frac{d^2 \theta}{dX^2} + \beta^* \theta \frac{d^2 \theta}{dX^2} + \beta^* \left(\frac{d\theta}{dX} \right)^2 - (M^*)^2 \theta - N_r^* \theta = 0 \quad (10)$$

Where

$$\beta^* = \frac{\beta}{(1 + 4R_d)}, (M^*)^2 = \frac{M^2}{(1 + 4R_d)}, N_r^* = \frac{N_r}{(1 + 4R_d)} \quad (11)$$

With appropriate boundary conditions stated as

$$X = 0, \frac{d\theta}{dX} = 0 \\ X = 1, \theta = 1 \quad (12)$$

2.1. Principles of Variation of Parameters Method (VPM)

The procedural concept or technique of the variation of parameters method (VPM) for analysis of differential equation is expressed as follows. Nonlinear form of differential equation is in the operator form

$$Lf(\eta) + Rf(\eta) + Nf(\eta) = g \quad (13)$$

Given

L is easily convertible and the highest order derivative

R is the linear operator remainder and is less compared with L

G is the source term or system input

u is the system output

Nu is the nonlinear equation terms

Decomposing Eq. (13) above into L+R. Therefore the VPM can be defined as follows

$$f_{n+1}(\eta) = f_0(\eta) + \int_0^\eta \lambda(\eta\xi) (-Rf_n(\xi) - Nf_n(\xi) - g(\xi)) d\xi \quad (14)$$

Where initial approximation $f_0(\eta)$ is given by

$$f_0(\eta) = \sum_{i=0}^m \frac{k_i f^i(0)}{i!} \quad (15)$$

Where

m is the order of the given differential equation

k_i is an unknown constant which could be obtained using initial/boundary conditions

$\lambda(\eta, \xi)$ is a multiplier which reduces the equation order of integration, which is determined adopting the Wronskian technique stated as Sobamowo et al. [25]

$$\lambda(\eta, \xi) = \sum_{i=0}^m \frac{(-1)^{i-1} \xi^{i-1} \eta^{m-1}}{(i-1)!(m-i)!} = \frac{(\eta - \xi)^{m-1}}{(m-1)!} \quad (16)$$

2.2 Application of the Variation of Parameters Method

Applying the standard procedure of the VPM the Eq. (10) is presented as

$$\theta_{n+1}(x) = k_1 + k_2 \xi - \int_0^x (x - \xi) \left[\beta^* \theta \frac{d^2 \theta}{d\xi^2} + \beta^* \left(\frac{d\theta}{d\xi} \right)^2 - (M^*)^2 \theta - N_r^* \theta \right] d\xi \quad (17)$$

Here k_1 and k_2 are constant. They are derived by taking the highest order in the linear term Eq. (10) which is integrated twice, to generate the scheme final form. Applying the boundary condition Eq. (12). The above equation can be written as

$$\theta_{n+1}(x) = k_2 \xi - \int_0^x (x - \xi) \left[\beta^* \theta \frac{d^2 \theta}{d\xi^2} + \beta^* \left(\frac{d\theta}{d\xi} \right)^2 - (M^*)^2 \theta - N_r^* \theta \right] d\xi \quad (18)$$

Following the iterative scheme, it can be easily shown that

$$\theta_0 = 1 \quad (19)$$

$$\theta_1 = -\frac{M^{*2}}{6} (1 - x^3) + \frac{N_r^*}{6} (1 - x^3) + \quad (13)$$

$$\frac{M^{*2}}{2} (1 - x^3) - \frac{N_r^*}{2} (1 - x^3) - 1 \quad (20)$$

$$\begin{aligned} \theta_2 = & \frac{\beta M^{*2}}{12}(1-x^4) - \frac{\beta N_r^*}{12}(1-x^4) \\ & - \frac{\beta M^{*2}}{6}(1-x^4) + \frac{\beta N_r^*}{6}(1-x^4) \\ & - \frac{M^{*4}}{36}(x^3-x^6) + \frac{M^{*4}N_r^*}{36}(x^3-x^6) \\ & + \frac{M^{*4}}{12}(x^3-x^6) - \frac{M^{*2}N_r^*}{36}(x^3-x^6) \\ & - \frac{M^{*2}}{6}(1-x^3) - \frac{N_r^*M^{*4}}{36}(x^3-x^6) \\ & + \frac{N_r^*}{36}(x^3-x^6) + \frac{N_r^*M^{*2}}{12}(x^3-x^6) \\ & - \frac{N_r^*}{12}(x^3-x^6) - \frac{N_r^*}{6}(1-x^3) \\ & - \frac{\beta M^{*2}}{6}(1-x^4) + \frac{\beta N_r^*}{6}(1-x^4) + \\ & \frac{\beta M^{*2}}{2}(1-x^4) - \frac{\beta N_r^*}{2}(1-x^4) + \\ & + \frac{M^{*4}}{12}(x^3-x^6) - \frac{N_r^*M^{*2}}{12}(x^3-x^6) - \\ & \frac{M^{*4}}{4}(x^3-x^6) + \frac{N_r^*M^{*2}}{4}(x^3-x^6) \\ & + \frac{M^{*2}}{2}(1-x^3) - \frac{N_r^*M^{*2}}{12}(x^3-x^6) \\ & \frac{N_r^*}{12}(x^3-x^6) + \frac{N_r^*M^{*2}}{4}(x^3-x^6) \\ & - \frac{N_r^*}{4}(x^3-x^6) - \frac{N_r^*}{2}(1-x^3) + 1 \end{aligned} \tag{21}$$

$$\begin{aligned} \eta = & \frac{M^{*2}}{2} - \frac{N_r^*}{2} - \frac{3M^{*2}}{2} + \frac{3N_r^*}{2} - \frac{\beta M^{*2}}{3} + \frac{\beta N_r^*}{3} \\ & + \frac{2\beta M^{*2}}{3} - \frac{2\beta N_r^*}{3} + \frac{M^{*4}}{12} - \frac{N_r^*M^{*2}}{12} - \frac{2M^{*4}}{4} \\ & + \frac{N_r^*M^{*2}}{4} + \frac{M^{*2}}{2} + \frac{N_r^*M^{*2}}{12} - \frac{N_r^*}{12} - \frac{N_r^*M^{*2}}{4} \\ & + \frac{N_r^*}{4} + \frac{N_r^*}{2} + \frac{2\beta M^{*2}}{3} - 2\beta M^{*2} + 2\beta N_r^* + \\ & \frac{N_r^*M^{*2}}{4} + \frac{3M^{*4}}{4} - \frac{3N_r^*M^{*2}}{4} - \frac{3M^{*2}}{2} + \\ & \frac{N_r^*M^{*2}}{4} - \frac{N_r^*}{4} - \frac{3N_r^*M^{*2}}{4} + \frac{3N_r^*}{4} + \frac{3N_r^*}{2} \end{aligned} \tag{23}$$

3. Results and Discussion

The validation of present study against numerical solutions (NM) and the Chebychev spectral collocation method (CSCM) is illustrated in Table 1. This proves the accuracy of the variation of parameter method (VPM) in providing solutions to strongly dependent nonlinear solution through yet a simple and convenient method of solution. The effect of thermal conductivity or nonlinear parameter (β) on heat transfer is illustrated in Figs. 2 and 3. As depicted from the plots increasing numerical values of β shows increasing temperature distribution across the fin length which is due to heat transfer increase across fins surface to ambient environment. Owing to rapid heat conduction from fins prime surface to base of fin.

Table 1. Comparison of various values of x for dimensionless temperature.

| X | NM[26] | CSCM[26] | VPM(Present Study) |
|-----|----------|----------|--------------------|
| 0.0 | 0.648054 | 0.648054 | 0.648054 |
| 0.1 | 0.651297 | 0.651297 | 0.651297 |
| 0.2 | 0.661059 | 0.661059 | 0.661059 |
| 0.3 | 0.677436 | 0.677436 | 0.677436 |
| 0.4 | 0.700594 | 0.700594 | 0.700594 |
| 0.5 | 0.730763 | 0.730763 | 0.730763 |
| 0.6 | 0.768246 | 0.768246 | 0.768246 |
| 0.7 | 0.813418 | 0.813418 | 0.813418 |
| 0.8 | 0.866731 | 0.866731 | 0.866731 |
| 0.9 | 0.928718 | 0.928718 | 0.928718 |

The Newton law of cooling is applied in determining the fins heat transfer. Therefore ratio of actual heat transfer from fin surface to heat transfer from the surface of the entire fin is at the same temperature as the base. This is regarded as efficiency of the fin, derived as:

$$\eta = \frac{Q}{Q_{ideal}} = \frac{\int_0^b P(T-T_\infty)dx}{Pb(T_b-T_\infty)} = \int_{\xi=0}^1 \theta(x)dx \tag{22}$$

Therefore fins efficiency can be obtained upon simplifying the Eq. (22) which can be easily shown as

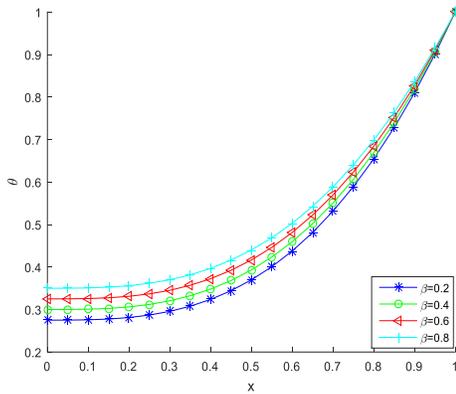


Figure 2. Effect of nonlinear parameter on temperature distribution. Where $N_r=1.75$, $M=1$.

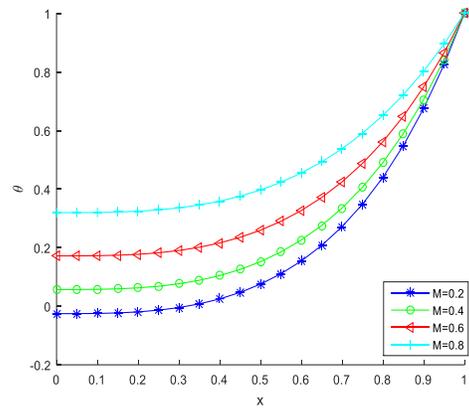


Figure 5. Effect of thermo geometric parameter on temperature distribution. Where $N_r=1.0$, $\beta=0.3$.

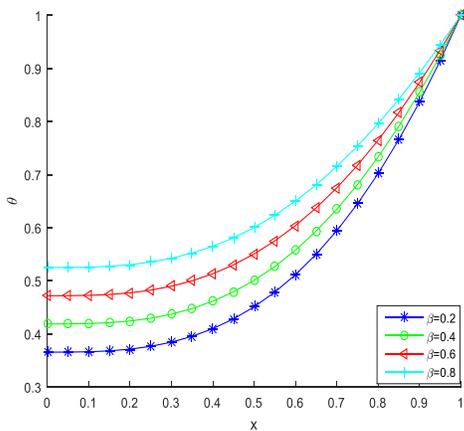


Figure 3. Effect of nonlinear parameter on temperature distribution. Where $N_r=2.0$, $M=1.75$.

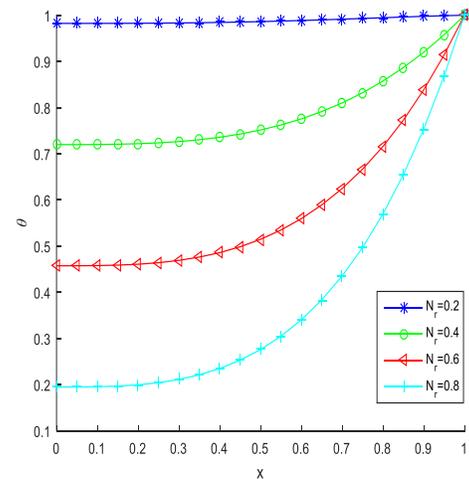


Figure 6. Effect of radiative parameter on temperature distribution. Where $M=0.5$, $\beta=1.25$.

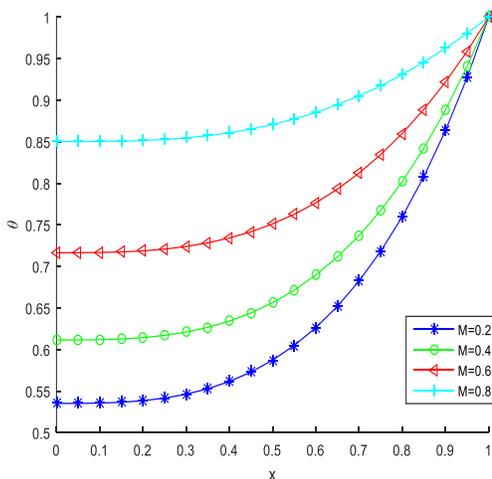


Figure 4. Effect of thermo geometric parameter on temperature distribution. Where $N_r=0.5$, $\beta=0.1$.

As observed in Fig. 4 and 5, effect of thermo-geometric parameter (M) influence on convective radiative fin is shown. As depicted M as significant influence on heat transfer, as quantitative increase in M parameter leads to significant increase in temperature distribution. This shows M as high impact on temperature distribution and heat transfer. As this phenomenon can be physically explained due to increase in ratio of convective/conduction heat transfer which influence is significant toward fin base. Radiative parameter (N_r) effect on temperature distribution is observed in Fig. 6. As depicted increasing N_r shows rapid decrease in temperature distribution which is due to increasing heat transfer from fins surface to ambient environment.

application in heat exchange media such as radiator, gas and steam plants, boiler, refrigeration and air conditioning equipment's and oil pipe lines amongst others.

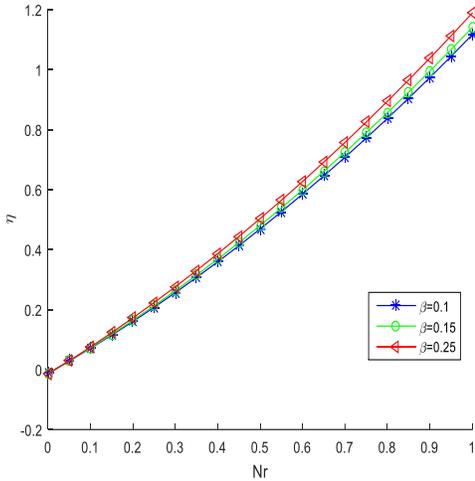


Figure 7. Effect of nonlinear parameter on fins efficiency. Where $M=0.1$.

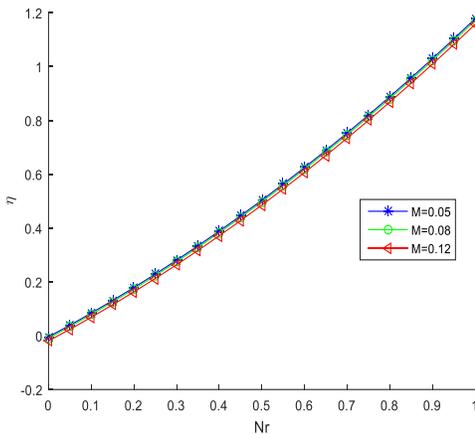


Figure 8. Effect of thermo-geometric parameter on fins efficiency. Where $\beta=0.2$.

Figure 7 represents the effect of nonlinear parameter (β) on fins efficiency. From the plot it is observed that increase in β causes increase in fins efficiency while effect of thermo-geometric parameter (M) shows increasing M parameter leads to decrease in efficiency. Also it worth noting that increasing radiation improves efficiency of the fin.

4. Conclusion

This paper studies convection- radiation effect on straight fins with temperature dependent thermal conductivity using the variation of parameter method (VPM). The VPM is adopted in generating approximate analytical solutions to strongly nonlinear higher order ordinary equation describing the heat transfer. Solutions obtained are used to investigate pertinent heat transfer parameter including thermo-geometric and radiation parameter on heat transfer. Result obtained shows increasing thermo-geometric parameter leads to increase in temperature distribution while increase in radiation parameter causes decrease in temperature distribution. Therefore study can be said to provide useful insight to the operational and thermal performance of fins

Nomenclature

| | |
|------------|--|
| a_r | Aspect ratio |
| b | Fins length |
| A_c | Cross sectional area fo fins |
| A_p | Profile area of fins |
| Bi | Biot number |
| h | Convective heat transfer coefficient |
| k | Thermal conductivity of fin material |
| k_a | Thermal conductivity of fin at ambient temperature |
| k_b | Thermal conductivity of fin material |
| K | Dimensionless thermal conductivity of fin material |
| M | Dimensionless thermo-geometric fin parameter |
| m^2 | Thermo-geometric fin parameter |
| N_r | Radiative parameter |
| P | Perimeter of fin |
| T | Temperature |
| T_∞ | Ambient temperature |
| T_b | Temperature at fins base |
| X | Dimensionless length of fin |
| q | Rate of heat transfer |
| Q_r | Dimensionless heat transfer |

Greek Symbols

| | |
|---------------|---|
| β | Nonlinear or Thermal conductivity parameter |
| δ | Thickness of the fin,m |
| θ | Dimensionless temperature |
| θ_b | Dimensionless temperature at base of fin |
| η | Efficiency of the fin |
| ε | Effectiveness of the fin |

References

- [1] A. Aziz, S. E. Huq, Perturbation solution for convecting fin with variable thermal conductivity, *Journal of Heat transfer*, Vol. 97, No. 2, pp. 300-301, 1975.
- [2] A. Aziz, Perturbation solution for convective fin with internal heat generation and temperature dependent thermal conductivity, *International Journal of Heat and Mass Transfer*, Vol. 20, No. 11, pp. 1253-1255, 1977.
- [3] S. Mosayebidorcheh, D. Ganji, M. Farzinpoor, Approximate solution of the nonlinear heat transfer equation of a fin with the power-law temperature-dependent thermal conductivity and heat transfer coefficient, *Propulsion and Power Research*, Vol. 3, No. 1, pp. 41-47, 2014.
- [4] D. Ganji, A. Dogonchi, Analytical investigation of convective heat transfer of a longitudinal fin with temperature-dependent thermal conductivity, heat transfer coefficient and heat generation, *International Journal of Physical Sciences*, Vol. 9, No. 21, pp. 466-474, 2014.
- [5] A. Aziz, M. Bouaziz, A least squares method for a longitudinal fin with temperature dependent internal heat generation and thermal conductivity, *Energy conversion and Management*, Vol. 52, No. 8-9, pp. 2876-2882, 2011.
- [6] K. Hosseini, B. Daneshian, N. Amanifard, R. Ansari, Homotopy analysis method for a fin with temperature dependent internal heat generation and thermal conductivity, *International Journal of Nonlinear Science*, Vol. 14, No. 2, pp. 201-210, 2012.
- [7] S. E. Ghasemi, M. Hatami, D. Ganji, Thermal analysis of convective fin with temperature-dependent thermal conductivity and heat generation, *Case Studies in Thermal Engineering*, Vol. 4, pp. 1-8, 2014.
- [8] M. Hatami, G. R. M. Ahangar, D. Ganji, K. Boubaker, Refrigeration efficiency analysis for fully wet semi-spherical porous fins, *Energy conversion and management*, Vol. 84, pp. 533-540, 2014.
- [9] M. Hatami, D. Ganji, M. Gorji-Bandpy, Numerical study of finned type heat exchangers for ICEs exhaust waste heat recovery, *Case Studies in Thermal Engineering*, Vol. 4, pp. 53-64, 2014.
- [10] M. Hatami, D. Ganji, M. Gorji-Bandpy, Experimental and thermodynamical analyses of the diesel exhaust vortex generator heat exchanger for optimizing its operating condition, *Applied Thermal Engineering*, Vol. 75, pp. 580-591, 2015.
- [11] M. Hatami, D. Ganji, Thermal behavior of longitudinal convective-radiative porous fins with different section shapes and ceramic materials (SiC and Si₃N₄), *Ceramics International*, Vol. 40, No. 5, pp. 6765-6775, 2014.
- [12] M. Hatami, M. Jafaryar, D. Ganji, M. Gorji-Bandpy, Optimization of finned-tube heat exchangers for diesel exhaust waste heat recovery using CFD and CCD techniques, *International Communications in Heat and Mass Transfer*, Vol. 57, pp. 254-263, 2014.
- [13] M. T. Atay, S. B. Coşkun, Comparative analysis of power-law fin-type problems using variational iteration method and finite element method, *Mathematical Problems in Engineering*, Vol. 2008, 2008.
- [14] M. Chowdhury, I. Hashim, O. Abdulaziz, Comparison of homotopy analysis method and homotopy-perturbation method for purely nonlinear fin-type problems, *Communications in Nonlinear Science and Numerical Simulation*, Vol. 14, No. 2, pp. 371-378, 2009.
- [15] R. Moitsheki, T. Hayat, M. Malik, Some exact solutions of the fin problem with a power law temperature-dependent thermal conductivity, *Nonlinear Analysis: Real World Applications*, Vol. 11, No. 5, pp. 3287-3294, 2010.
- [16] F. Khani, M. A. Raji, H. H. Nejad, Analytical solutions and efficiency of the nonlinear fin problem with temperature-dependent thermal conductivity and heat transfer coefficient, *Communications in Nonlinear Science and Numerical Simulation*, Vol. 14, No. 8, pp. 3327-3338, 2009.
- [17] G. Domairry, M. Fazeli, Homotopy analysis method to determine the fin efficiency of convective straight fins with temperature-dependent thermal conductivity, *Communications in Nonlinear Science and Numerical Simulation*, Vol. 14, No. 2, pp. 489-499, 2009.
- [18] S. B. Coşkun, M. T. Atay, Fin efficiency analysis of convective straight fins with temperature dependent thermal conductivity using variational iteration method, *Applied Thermal Engineering*, Vol. 28, No. 17-18, pp. 2345-2352, 2008.
- [19] E. M. Languri, D. Ganji, N. Jamshidi, Variational Iteration and Homotopy perturbation methods for fin efficiency of convective straight fins with temperature dependent thermal conductivity. 5th WSEAS Int, in *Proceeding of*, 25-27.
- [20] G. O. and Gbeminiyi Sobamowo, Galerkin's Method of Weighted Residual for a Convective Straight Fin with Temperature-dependent Conductivity and Internal Heat Generation, *International Journal of Engineering and Technology*, Vol. 6, No. 12, 2016.
- [21] U. Filobello-Niño, H. Vazquez-Leal, K. Boubaker, Y. Khan, A. Perez-Sesma, A. Sarmiento-Reyes, V. Jimenez-Fernandez, A. Diaz-Sanchez, A. Herrera-May, J. Sanchez-Orea, Perturbation method as a powerful tool to solve highly nonlinear problems: the case of Gelfand's equation, *Asian Journal of Mathematics & Statistics*, Vol. 6, No. 2, pp. 76, 2013.
- [22] C. Lim, B. Wu, *Modified Mickens procedure for certain non-linear oscillators*, Academic Press, 2002.
- [23] Y. Cheung, S. Chen, S. Lau, A modified Lindstedt-Poincaré method for certain strongly non-linear oscillators, *International Journal of Non-Linear Mechanics*, Vol. 26, No. 3-4, pp. 367-378, 1991.
- [24] R. W. Lewis, P. Nithiarasu, K. N. Seetharamu, 2004, *Fundamentals of the finite element method for heat and fluid flow*, John Wiley & Sons,
- [25] M. Sobamowo, L. Jayesimi, M. Waheed, Magnetohydrodynamic squeezing flow analysis of nanofluid under the effect of slip boundary conditions using variation of parameter method, *Karbala International Journal of Modern Science*, 2018.
- [26] G. Oguntala, R. A. Abd-Alhameed, Thermal Analysis of Convective-Radiative Fin with Temperature-Dependent Thermal Conductivity Using Chebyshev Spectral Collocation Method, 2018.
- [27] M. Goodarzi, M. Mohammadi, M. Khooran, F. Saadi, Thermo-mechanical vibration analysis of FG circular and annular nanoplate based on the visco-pasternak foundation, *Journal of Solid Mechanics* Vol. 8, No. 4, pp. 788-805, 2016.
- [28] A. Farajpour, A. Rastgoo, M. Mohammadi, Vibration, buckling and smart control of microtubules using piezoelectric nanoshells under electric voltage in thermal environment, *Physica B: Condensed Matter*, Vol. 509, pp. 100-114, 2017.
- [29] M. Safarabadi, M. Mohammadi, A. Farajpour, M. Goodarzi, Effect of surface energy on the vibration analysis of rotating nanobeam, *Journal of Solid Mechanics*, Vol. 7, No. 3, pp. 299-311, 2015.
- [30] M. Mohammadi, M. Ghayour, A. Farajpour, Analysis of free vibration sector plate based on elastic medium by using new version of differential quadrature method, 2011.

- [31] M. Mohammadi, A. Farajpour, M. Goodarzi, H. Mohammadi, Temperature effect on vibration analysis of annular graphene sheet embedded on visco-Pasternak foundation, 2013.
- [32] M. Goodarzi, M. Mohammadi, A. Farajpour, M. Khoran, Investigation of the effect of pre-stressed on vibration frequency of rectangular nanoplate based on a visco-Pasternak foundation, 2014.
- [33] M. R. Farajpour, A. Rastgoo, A. Farajpour, M. Mohammadi, Vibration of piezoelectric nanofilm-based electromechanical sensors via higher-order non-local strain gradient theory, *Micro & Nano Letters*, Vol. 11, No. 6, pp. 302-307, 2016.
- [34] A. Farajpour, M. H. Yazdi, A. Rastgoo, M. Loghmani, M. Mohammadi, Nonlocal nonlinear plate model for large amplitude vibration of magneto-electro-elastic nanoplates, *Composite Structures*, Vol. 140, pp. 323-336, 2016.
- [35] M. Mohammadi, A. Farajpour, A. Moradi, M. Ghayour, Shear buckling of orthotropic rectangular graphene sheet embedded in an elastic medium in thermal environment, *Composites Part B: Engineering*, Vol. 56, pp. 629-637, 2014.
- [36] A. Farajpour, M. Danesh, M. Mohammadi, Buckling analysis of variable thickness nanoplates using nonlocal continuum mechanics, *Physica E: Low-dimensional Systems and Nanostructures*, Vol. 44, No. 3, pp. 719-727, 2011.
- [37] A. Farajpour, M. Mohammadi, A. Shahidi, M. Mahzoon, Axisymmetric buckling of the circular graphene sheets with the nonlocal continuum plate model, *Physica E: Low-dimensional Systems and Nanostructures*, Vol. 43, No. 10, pp. 1820-1825, 2011.
- [38] M. Danesh, A. Farajpour, M. Mohammadi, Axial vibration analysis of a tapered nanorod based on nonlocal elasticity theory and differential quadrature method, *Mechanics Research Communications*, Vol. 39, No. 1, pp. 23-27, 2012.
- [39] A. Farajpour, A. Shahidi, M. Mohammadi, M. Mahzoon, Buckling of orthotropic micro/nanoscale plates under linearly varying in-plane load via nonlocal continuum mechanics, *Composite Structures*, Vol. 94, No. 5, pp. 1605-1615, 2012.
- [40] M. Mohammadi, M. Ghayour, A. Farajpour, Free transverse vibration analysis of circular and annular graphene sheets with various boundary conditions using the nonlocal continuum plate model, *Composites Part B: Engineering*, Vol. 45, No. 1, pp. 32-42, 2013.